



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
ARTICULATING TELESCOPIC
AERIAL DEVICE

TAM SERIES

FEATURES

- Altec ISO-Grip® System
- 4-Function Single Handle Upper Control
- Working Height up to 60.6 ft (18.5 m)
- Side Reach up to 34.3 ft (10.5 m)
- Material Handling Capacity to 850 lb (386 kg)
- Elevator and Compensating Articulating Arms Maximize Reach & Height Capability
- Fiberglass Upper Boom & Lower Boom Insulator
- Insulated Aerial Device
- Centrifugally Cast Fiberglass Upper Boom
- Hydraulically Extendible Boom
- Material Handling System with Hydraulically Articulating Jib
- Continuous Rotation
- Platform, 24 x 30 x 42 in (610 x 762 x 1067 mm)
- Hydraulic Platform Rotation and Tilt
- Full Pressure, Closed Center Hydraulic System
- 90° Rotation Platform
- Modified A-Frame Outriggers
- Back-up Alarm
- Outrigger Motion Alarm
- Outrigger Boom Interlock System

OPTIONS

- Secondary Stowage System, 12 VDC
- Remote Engine Start/Stop
- Holder: Chain Saw
- Holder: Pruner
- Lifting Eye on Lower Boom
- Transverse or Longitudinal Elevator Mounts Available
- Platform Cover
- Throttle Control
- Tool Circuit at Tailshelf
- Hydraulically Extendible Jib


Recommended safety equipment, available through Altec Supply, include a platform liner, fall protection system, wheel chocks and outrigger pads.



CONFIGURATIONS

	TA37M	TA41M	TA41M-T46	TA41M-L46	TA41M-L51	TA45M	TA45M-T50	TA45M-L50	TA45M-L55
Ground to Bottom of Platform*	37.3 ft (11.4 m)	40.9 ft (12.5 m)	46.2 ft (14.1 m)	46.2 ft (14.1 m)	52.0 ft (15.8 m)	44.5 ft (13.6 m)	49.8 ft (15.2 m)	49.8 ft (15.2 m)	55.6 ft (16.9 m)
Working Height*	42.3 ft (12.9 m)	45.9 ft (14.0 m)	51.2 ft (15.6 m)	51.2 ft (15.6 m)	57.0 ft (17.4 m)	49.5 ft (15.1 m)	54.8 ft (16.7 m)	54.8 ft (16.7 m)	60.6 ft (18.5 m)
Reach from Centerline of Vehicle	27.3 ft (8.4 m)	30.5 ft (9.3 m)	34.3 ft (10.5 m)	30.6 ft (9.3 m)	30.6 ft (9.3 m)	30.5 ft (9.3 m)	34.3 ft (10.5 m)	30.7 ft (9.4 m)	30.7 ft (9.4 m)
Stowed Travel Height*	11.9 ft (3.6 m)	11.9 ft (3.6 m)	12.1 ft (3.7 m)	12.1 ft (3.7 m)	13.0 ft (4.0 m)	11.6 ft (3.5 m)	11.7 ft (3.6 m)	11.7 ft (3.6 m)	12.6 ft (3.9 m)
Platform Capacity	400 lb (181 kg)	350 lb (159 kg)	350 lb (159 kg)	350 lb (159 kg)	350 lb (159 kg)	350 lb (159 kg)	350 lb (159 kg)	350 lb (159 kg)	350 lb (159 kg)
*Based on a 40 in (1016 mm) chassis frame height.									

REACH DIAGRAM

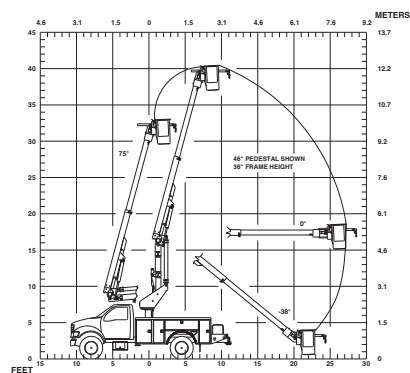

SUPERIOR REACH



COMPACT BOOM TIP



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2018 Altec Inc. All Rights Reserved. AITAMSERIES-318-v1